


EDGE^{LINE}

HT 92



Model	kg	kg	kg	kg	kg
HT92 E2	4060	2150	1445		
m	2,16	4,07	5,98		
HT92 E3	3900	2040	1375	990	
m	2,24	4,15	6,05	8,00	
HT92 E4	3700	1940	1290	945	735
m	2,31	4,22	6,13	8,08	10,03

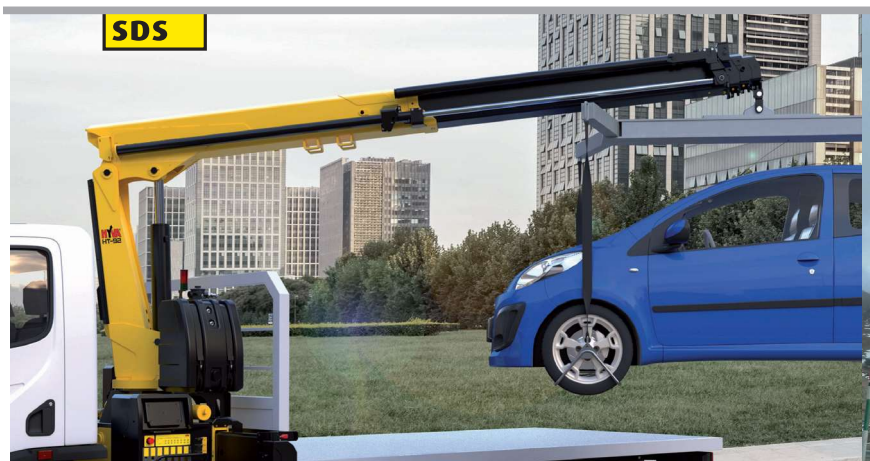

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HT92 E2	8,77	9,2	425	20	4	300	945	75	40	2315x2295x825
HT92 E3	-	11,1	425	20	4	300	1040	75	40	2315x2295x825
HT92 E4	-	13,1	425	20	4	300	1115	75	40	2315x2295x825