
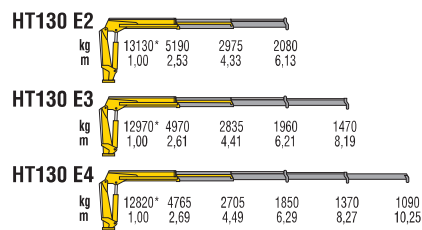


HT 130

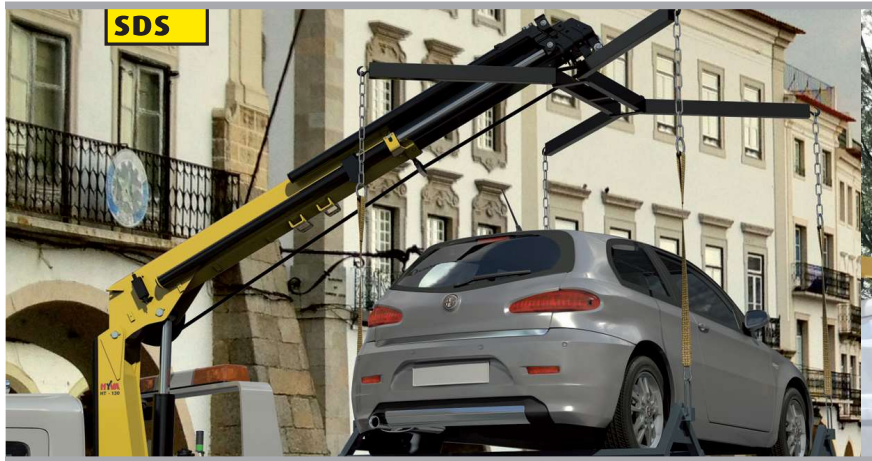

*) Theoretical lifting capacity

| MODELS | LIFTING MOMENT | MAX VERTICAL REACH (HYDR) | SLEWING ANGLE | SLEWING TIME | MAX WORKING HEEL | WORKING PRESSURE | CRANE WEIGHT WITHOUT STABILIZERS | OIL TANK CAPACITY | OIL FLOW | DIMENSIONS |
|----------|----------------|---------------------------|---------------|--------------|------------------|------------------|----------------------------------|-------------------|----------|---------------|
| | tm | m | ° | s/180° | ° | bar | kg | l | l/min | mm B x h x S |
| HT130 E2 | 13,1 | 9,80 | 425 | 20 | 4 | 285 | 1285 | 130 | 30 | 2475x2300x830 |
| HT130 E3 | - | 11,8 | 425 | 20 | 4 | 285 | 1385 | 130 | 30 | 2475x2300x830 |
| HT130 E4 | - | 13,8 | 425 | 20 | 4 | 285 | 1480 | 130 | 30 | 2475x2300x830 |