
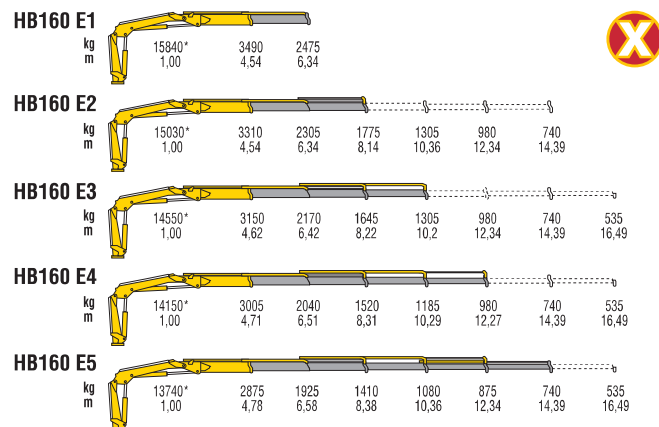


HB 160

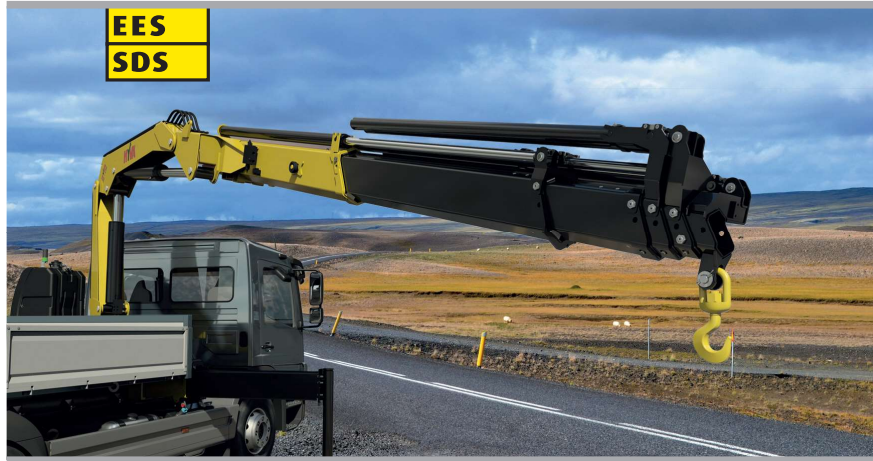

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB160 E1	15,8	9,9	425	20	4	280	1525	130	40	2490x2295x825
HB160 E2	-	11,7	425	20	4	280	1660	130	40	2490x2295x825
HB160 E3	-	13,7	425	20	4	280	1775	130	40	2490x2295x825
HB160 E4	-	15,7	425	20	4	280	1880	130	40	2490x2295x825
HB160 E5	-	17,8	425	20	4	280	1970	130	40	2490x2295x905