


HOOKLOADER: T12-S-BOLTABLE

H=1570 CH=1050 (mm)

Capacity class of the hookloader: 120 kN

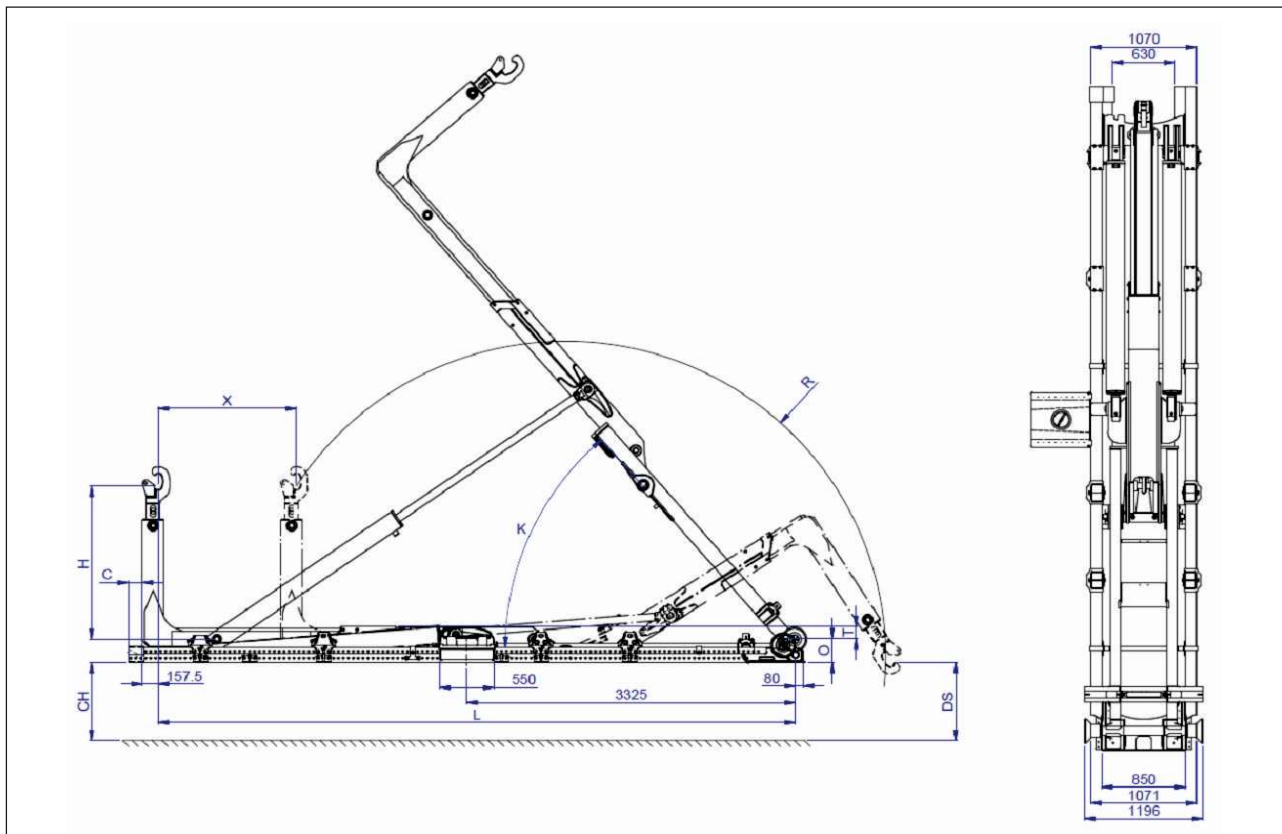

TYPE:	T12-40-S	T12-42-S	T12-45-S	T12-47-S	T12-49-S	T12-51-S	T12-53-S
Description	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters
X (mm)	650	800	900	1000	1000	1000	1200
L (mm)	4000	4200	4500	4700	4900	5050	5300
O (mm)	220	220	220	220	220	220	220
K	52 °	51°	49°	54°	50°	48°	55°
R (mm)	2654	2654	2731	2870	2870	2870	3025
T (mm)	130	130	130	130	130	130	130
Weight¹ (kg)	1675	1725	1750	1800	1825	1850	1975
DS (mm)	1067	1067	1131	1090	1090	1090	985
Min./max. container length (mm)	3400-5100	3450-5300	3650-5500	3700-5800	3900-6000	4050-6150	4100-6400
C (mm)	200	200	200	200	200	200	200
Loading (time)² (s)	30	31	32	37	37	37	44
Unloading (time)² (s)	36	37	38	44	44	44	52
Tipping (time)² (s)	31	31	31	37	37	37	44
Fast unloading (time)² (s)	11	11	12	14	14	14	16
Supplied Pump (l/min)	47	47	47	47	47	47	47
Flow (l/min)	60	60	60	60	60	60	60

H = Hook height (mm)

CH = Chassis height (mm)

DS = Lowest pick up point (depending on hook- and chassis height) (mm)

¹ Rough estimation based on a standard system, filled with oil and without mounting kit accessories.

² Rough estimation based on PTO type C, pump 40 l/min., motor 1200rpm, PTO transmission i = 1.0 and dependent on cylinder thickness.

Pressure: 350 bar