


H=1570 CH=1050 (mm)

Capacity class of the hookloader: 180 kN

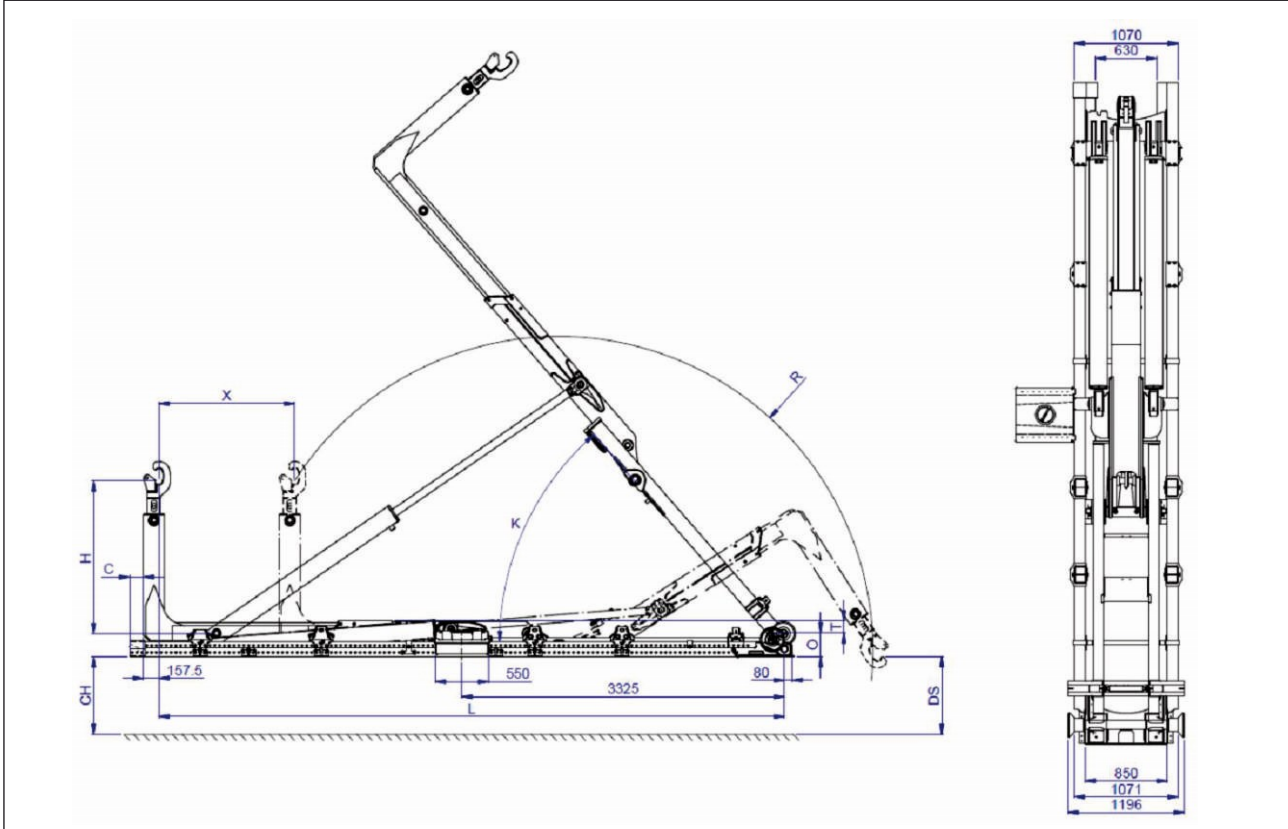

TYPE:	T18-47-S	T18-49-S	T18-51-S	T18-53-S	T18-55-S	T18-57-S	T18-60-S	T18-62-S
Description	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters
X (mm)	1000	1000	1000	1200	1200	1200	1400	1400
L (mm)	4700	4900	5050	5300	5500	5700	5950	6200
O (mm)	220	220	220	220	220	220	220	220
K	54°	50°	48°	55°	52°	49°	54°	51°
R (mm)	2870	2870	2870	3025	3025	3025	3150	3150
T (mm)	130	130	130	130	130	130	130	130
Weight ¹ (kg)	1850	1875	1900	2150	2175	2200	2250	2275
DS (mm)	1090	1090	1090	985	985	985	890	890
Min./max. container length (mm)	3700-5800	3900-6000	4050-6150	4100-6400	4300-6600	4500-6800	4550-7050	4800-7300
C (mm)	200	200	200	200	200	200	200	200
Loading (time) ² (s)	35	35	35	36	36	36	41	41
Unloading (time) ² (s)	43	43	43	46	46	46	52	52
Tipping (time) ² (s)	38	38	38	41	41	41	46	46
Fast unloading (time) ² (s)	13	13	13	14	14	14	16	16
Supplied Pump (l/min)	64	64	64	84	84	84	84	84
Flow (l/min)	80	80	80	100	100	100	100	100

H = Hook height (mm)

CH = Chassis height (mm)

DS = Lowest pick up point (depending on hook- and chassis height) (mm)

¹ Rough estimation based on a standard system, filled with oil and without mounting kit accessories.

² Rough estimation based on PTO type C, pump 80 l/min., motor 1200rpm, PTO transmission i = 1.0 and dependent on cylinder thickness.

Pressure: 350 bar