


H=1570 CH=1050 (mm)

Capacity class of the hookloader: 260 kN

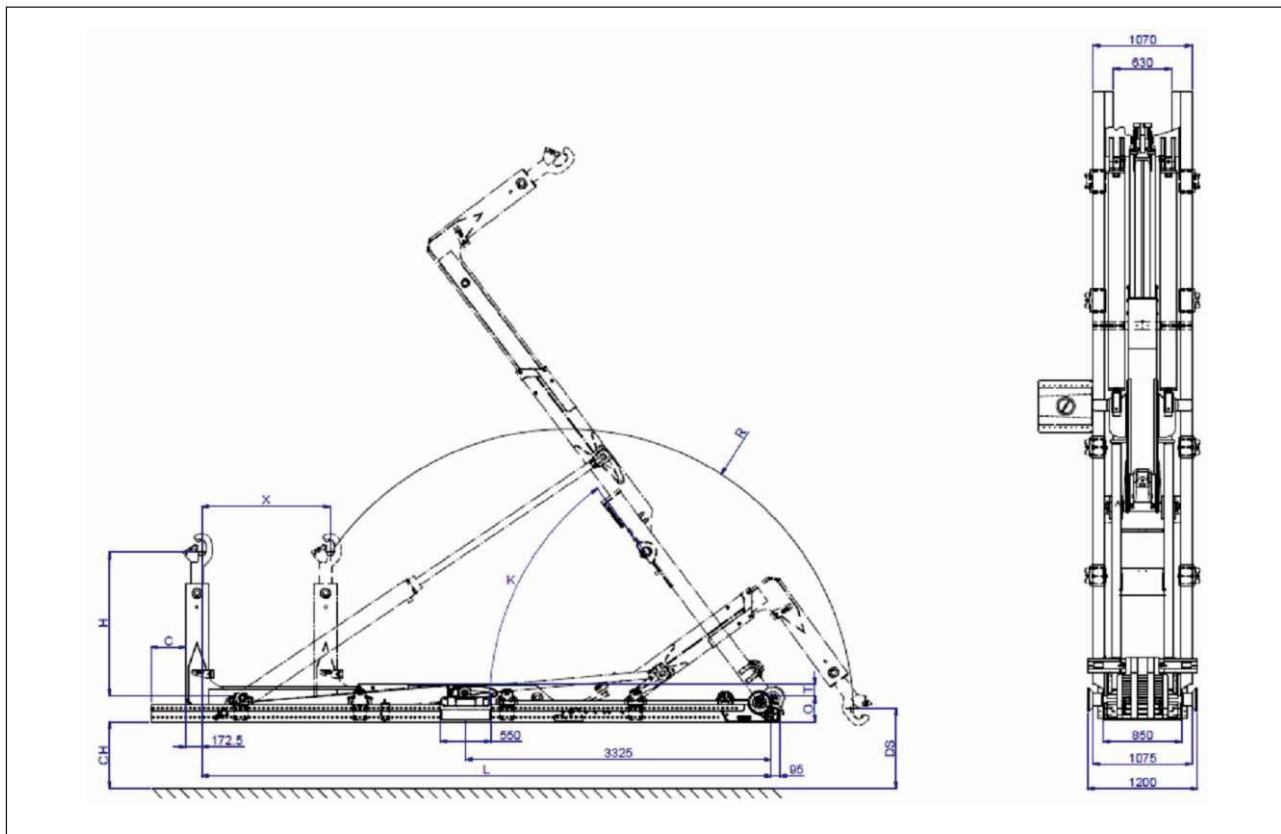

TYPE:	T26-47-S	T26-49-S	T26-51-S	T26-53-S	T26-55-S	T26-57-S	T26-60-S	T26-62-S	T26-65-S	T26-67-S
Description	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters
X (mm)	1000	1000	1000	1200	1200	1200	1400	1400	1400	1500
L (mm)	4700	4900	5050	5300	5500	5700	5950	6200	6450	6650
O (mm)	250	250	250	280	280	280	280	280	280	280
K	53 °	49°	47°	54°	51°	48°	53°	50°	48°	48°
R (mm)	2890	2890	2890	3065	3065	3065	3185	3185	3265	3345
T (mm)	130	130	130	130	130	130	130	130	130	130
Weight¹ (kg)	2325	2350	2400	2800	2825	2850	2900	2925	3050	3075
DS (mm)	1175	1175	1175	1115	1115	1115	1005	1005	1065	1120
Min./max. container length (mm)	3700-5800	3900-6000	4050-6150	4100-6400	4300-6600	4500-6800	4550-7050	4800-7300	5050-7550	5150-7750
C (mm)	200	200	200	200	200	200	200	200	150	150
Loading (time)² (s)	34	34	34	40	40	40	45	45	45	46
Unloading (time)² (s)	41	41	41	48	48	48	54	54	54	55
Tipping (time)² (s)	37	37	37	44	44	44	49	49	49	49
Fast unloading (time)² (s)	13	13	13	15	15	15	17	17	17	17
Supplied Pump (l/min)	108	108	108	108	108	108	108	108	108	108
Flow (l/min)	120	120	120	120	120	120	120	120	120	120

H = Hook height (mm)

CH = Chassis height (mm)

DS = Lowest pick up point (depending on hook- and chassis height) (mm)

¹ Rough estimation based on a standard system, filled with oil and without mounting kit accessories.

² Rough estimation based on PTO type C, pump 80 l/min., motor 1200rpm, PTO transmission i = 1.0 and dependent on cylinder thickness.

Pressure: 350 bar