


**H=1570 CH=1050 (mm)**

Capacity class of the hookloader: 160 kN

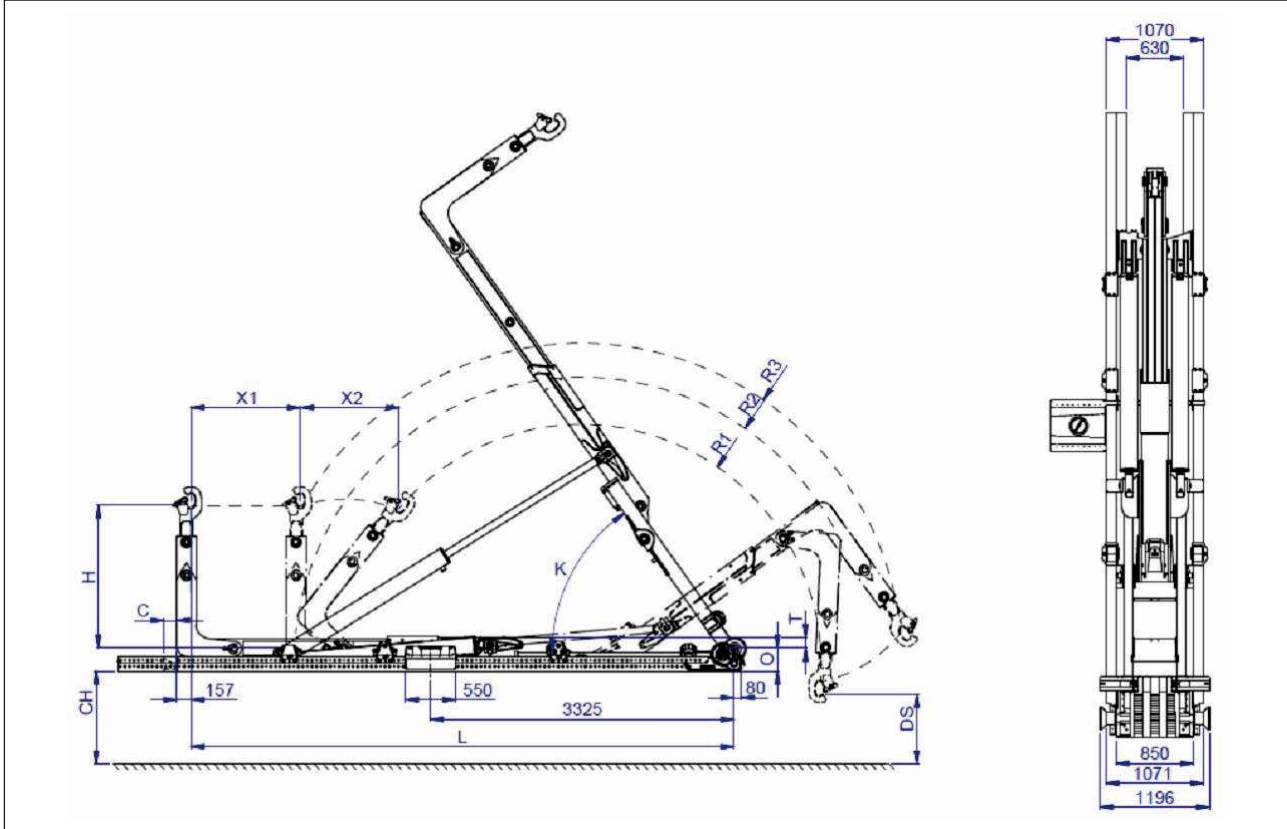

TYPE:	T16-45-SK
Description	Parameters
X1 (mm)	700
X2 (mm)	+1060
L (mm)	4500
O (mm)	220
K	53°
R1 (mm)	2219
R2 (mm)	2621
R3 (mm)	3052
T (mm)	123
Weight <sup>1</sup> (kg)	2400
DS (mm)	771
Min./max. container length (mm)	2740-5600
C (mm)	157
Loading (time) <sup>2</sup> (s)	27
Unloading (time) <sup>2</sup> (s)	37
Tipping (time) <sup>2</sup> (s)	31
Fast unloading (time) <sup>2</sup> (s)	11
Supplied Pump (l/min)	64

H = Hook height (mm)

CH = Chassis height (mm)

DS = Lowest pick up point (depending on hook- and chassis height) (mm)

<sup>1</sup> Rough estimation based on a standard system, filled with oil and without mounting kit accessories.

<sup>2</sup> Rough estimation based on PTO type C, pump 80 l/min., motor 1200rpm, PTO transmission i = 1.0 and dependent on cylinder thickness.

Pressure: 350 bar