


**H=1570 CH=1050 (mm)**

Capacity class of the hookloader: 180 kN

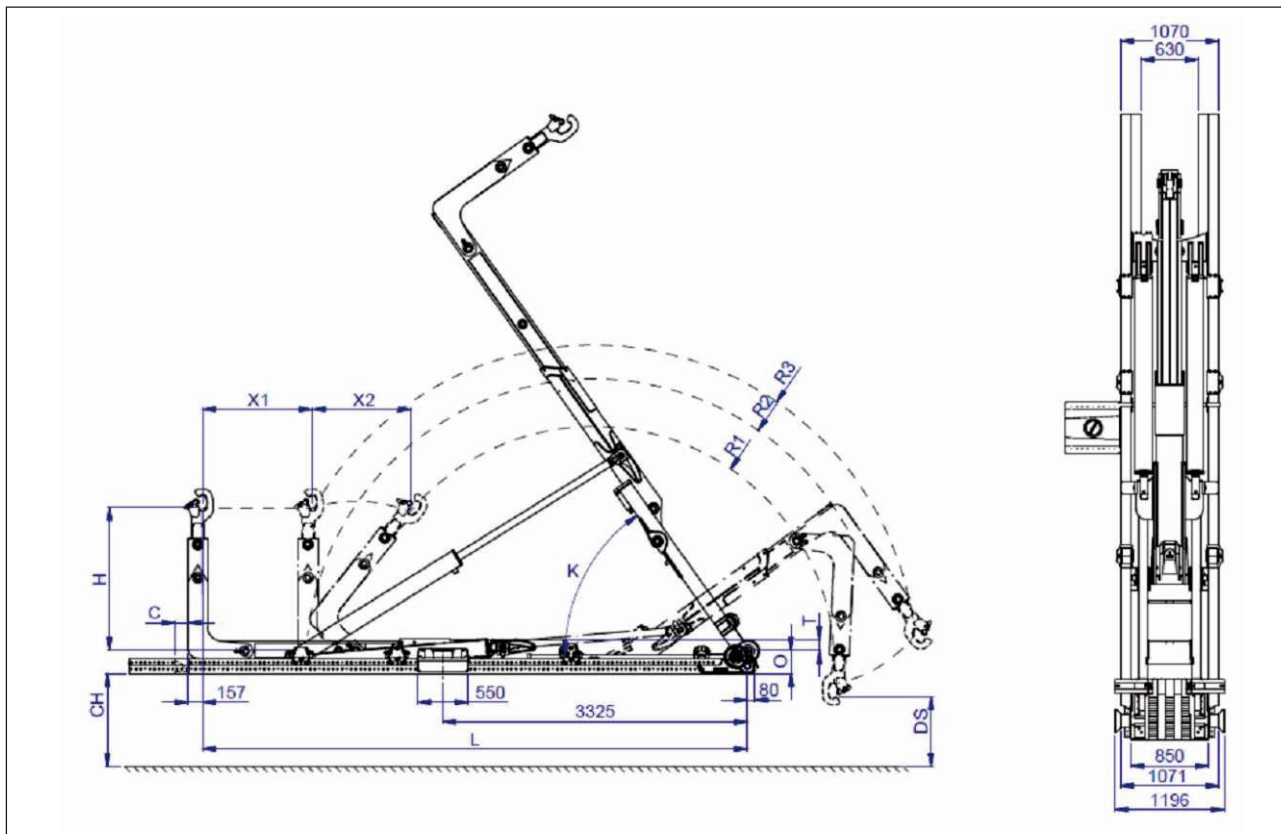

| TYPE:                                  | T18-45-SK  |
|----------------------------------------|------------|
| Description                            | Parameters |
| X1 (mm)                                | 700        |
| X2 (mm)                                | +1060      |
| L (mm)                                 | 4500       |
| O (mm)                                 | 220        |
| K                                      | 53°        |
| R1 (mm)                                | 2219       |
| R2 (mm)                                | 2621       |
| R3 (mm)                                | 3052       |
| T (mm)                                 | 123        |
| Weight <sup>1</sup> (kg)               | 2400       |
| DS (mm)                                | 771        |
| Min./max. container length (mm)        | 2740-5600  |
| C (mm)                                 | 157        |
| Loading (time) <sup>2</sup> (s)        | 27         |
| Unloading (time) <sup>2</sup> (s)      | 37         |
| Tipping (time) <sup>2</sup> (s)        | 31         |
| Fast unloading (time) <sup>2</sup> (s) | 11         |
| Supplied Pump (l/min)                  | 64         |

H = Hook height (mm)

CH = Chassis height (mm)

DS = Lowest pick up point (depending on hook- and chassis height) (mm)

<sup>1</sup> Rough estimation based on a standard system, filled with oil and without mounting kit accessories.

<sup>2</sup> Rough estimation based on PTO type C, pump 80 l/min., motor 1200rpm, PTO transmission i = 1.0 and dependent on cylinder thickness.

Pressure: 350 bar