


H=1570 CH=1050 (mm)

Capacity class of the hookloader: 260 kN

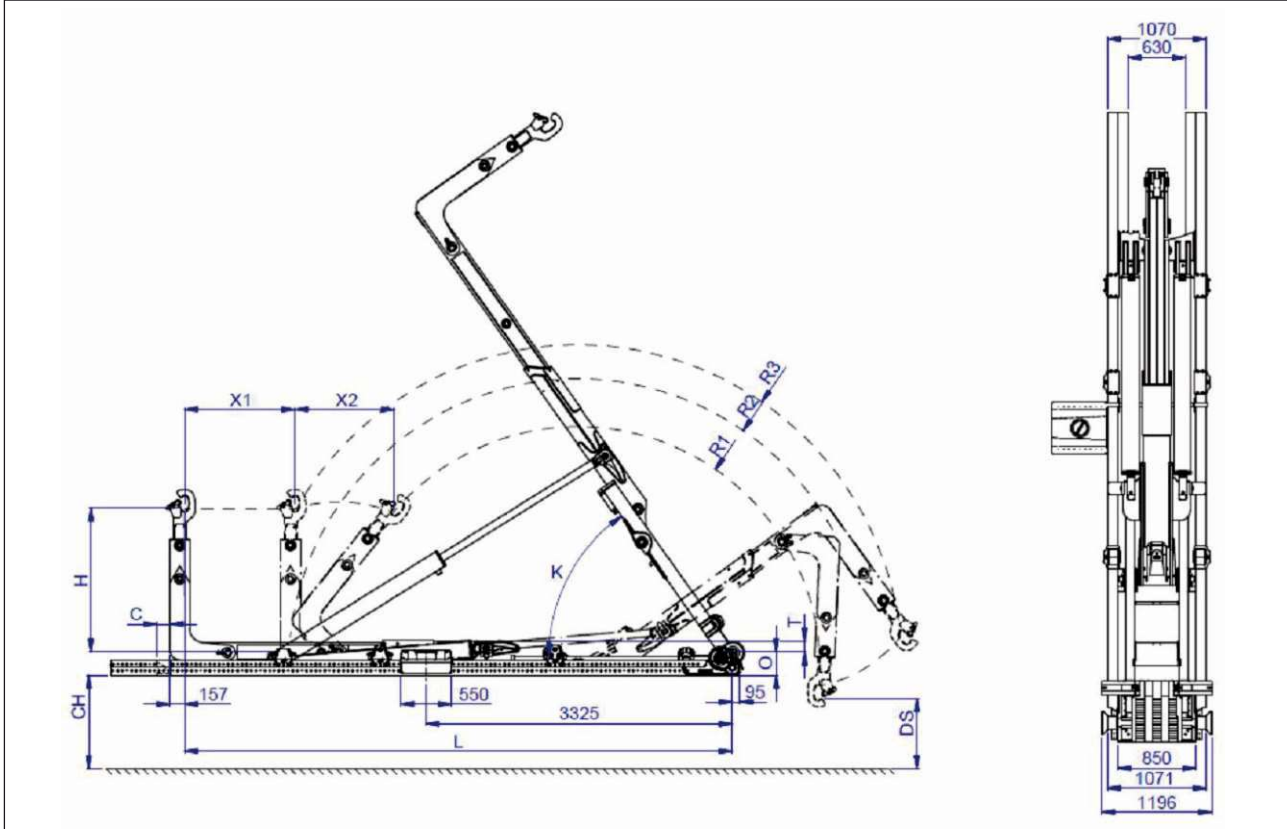

TYPE:	T26-51-SK	T26-53-SK	T26-55-SK	T26-57-SK	T26-60-SK	T26-62-SK	T26-65-SK	T26-67-SK	T26-75-SK	T26-80-SK
Description	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters
X1 (mm)	800	1000	900	1000	1200	1200	1400	1400	1600	1800
X2 (mm)	+1150	+1150	+1150	+1150	+1150	+1150	+1150	+1150	+1090	+1090
L (mm)	5050	5300	5500	5700	5950	6200	6450	6650	7500	8000
O (mm)	250	250	280	280	280	280	280	280	280	280
K	53°	53°	54°	54°	54°	54°	51°	51°	50°	50°
R1 (mm)	2445	2445	2525	2600	2635	2820	2710	2860	3135	3435
R2 (mm)	3005	3005	3110	3210	3260	3505	3355	3555	3630	3930
R3 (mm)	3375	3375	3475	3560	3600	3815	3685	3860	4135	4435
T (mm)	130	130	130	130	130	130	130	130	130	130
Weight¹ (kg)	2625	2675	3050	3100	3150	3200	3250	3325	3600	4000
DS (mm)	1055	1055	915	980	1010	1160	1070	1190	1200	1250
Min./max. container length (mm)	3150-6200	3150-6400	3450-6600	3550-6800	3600-7050	3850-7300	3900-7550	4100-7750	4860-8600	5160-9100
C (mm)	200	200	200	200	200	200	100	100	100	400
Loading (time)² (s)	30	31	35	36	37	37	38	43	48	50
Unloading (time)² (s)	38	39	45	45	46	46	46	51	56	58
Tipping (time)² (s)	33	33	39	39	39	39	39	44	48	48
Fast unloading (time)² (s)	12	12	14	14	14	14	14	16	18	18
Suppl. Pump (l/min)	108	108	108	108	108	108	108	108	108	108
Flow (l/min)	120	120	120	120	120	120	120	120	120	120

H = Hook height (mm)

CH = Chassis height (mm)

DS = Lowest pick up point (depending on hook- and chassis height) (mm)

¹ Rough estimation based on a standard system, filled with oil and without mounting kit accessories.

² Rough estimation based on PTO type C, pump 120 l/min., motor 1200rpm, PTO transmission i = 1.0 and dependent on cylinder thickness.

Pressure: 350 bar