


H=1570 CH=1050 (mm)

Capacity class of the hookloader: 300 kN

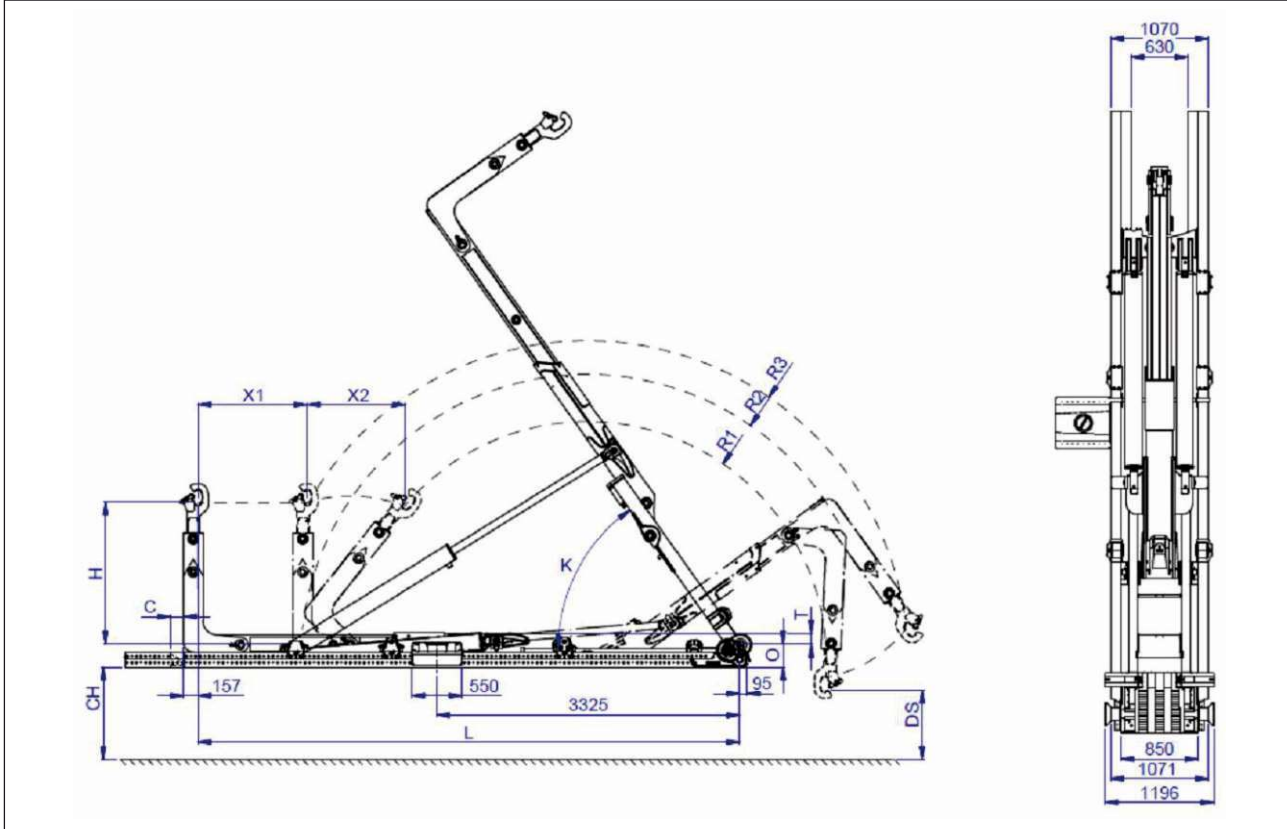

TYPE:	T30-55-SK	T30-57-SK	T30-60-SK	T30-62-SK	T30-65-SK	T30-67-SK	T30-75-SK
Description	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters
X1 (mm)	900	1000	1200	1200	1400	1400	1600
X2 (mm)	+1150	+1150	+1150	+1150	+1150	+1150	+1090
L (mm)	5500	5700	5950	6200	6450	6650	7500
O (mm)	280	280	280	280	280	280	280
K	54°	54°	54°	54°	51°	51°	50°
R1 (mm)	2525	2595	2630	2820	2705	2860	3135
R2 (mm)	3110	3210	3260	3505	3355	3555	3630
R3 (mm)	3470	3555	3600	3815	3685	3860	4135
T (mm)	130	130	130	130	130	130	130
Weight ¹ (kg)	3075	3125	3175	3225	3275	3325	3600
DS (mm)	775	835	865	1020	930	1050	1200
Min./max. container length(mm)	3450-6600	3550-6800	3600-7050	3850-7300	3900-7550	4100-7750	4860-8600
C (mm)	200	200	200	200	120	120	100
Loading (time) ² (s)	40	41	42	42	43	43	48
Unloading (time) ² (s)	50	50	51	51	51	51	56
Tipping (time) ² (s)	44	44	44	44	44	44	48
Fast unloading (time) ² (s)	15	15	16	16	16	16	18
Supplied Pump (l/min)	108	108	108	108	108	108	108
Flow (l/min)	120	120	120	120	120	120	120

H = Hook height (mm)

CH = Chassis height (mm)

DS = Lowest pick up point (depending on hook- and chassis height) (mm)

¹ Rough estimation based on a standard system, filled with oil and without mounting kit accessories.

² Rough estimation based on PTO type C, pump 80 l/min., motor 1200rpm, PTO transmission i = 1.0 and dependent on cylinder thickness.

Pressure: 350 bar